Just Regul®

Production ORP controller + pH regulator

Pool

Boost

ок '

T° + Salt + pH

for saltwater chlorinator



BENEFITS

- Intuitive navigation on backlit LCD display
- In line or dashboard display
- · Soft touch keyboard with quick access keys
- Permanent display of ORP and pH values
- High quality ORP and pH probes, factory tested and calibrated
- Integrated silent dosing pump
- Suitable for all type of saltwater chlorinators
- Bluetooth remote control with e-Pool® app
- Compatible with new European regulation (N°2019/1148) pH correcting agent adjustable concentration
- Transparent accessories holder






FEATURES

- Control and optimization of chlorine production thanks to ORP
 probe, specifically designed
- Smart and proportional pH regulation according to the pool volume in acid (pH-) or base (pH+) mode
- Limitations of chlorination issues and protection of pool equipments (cover, liners, etc...)
- Water temperature and salt level display
- Multilingual communication interface

- Multilingual alarm message: written message display of malfunction cause
- **Safeties:** high and low ORP values, unreached setpoint, pH setpoint overrun and overfeeding
- Adjustable ORP and pH setpoints
- Easy installation and assembly

Model	Pool volume* (m³)	Pump flow (l/h)	Reference	Technical spe	Technical specifications	
Just Regul	160	1,8	COOP20NPSA-G2	Display	LCD 2 lines	
				Corrective solution	pH- or pH+	
				Type of pH regulation	smart	
				pH setpoint adjustment	6,8 to 7,6	
				pH probe calibration	2 points pH 7 & pH 10	
				pH probe	Blue	
				ORP setpoint adjustment (mV)	200 to 900	
				ORP probe calibration	1 point 475 mV	
				ORP probe	ORP Gold	
				Control panel size (mm)	W 140 x H 300 x D 97	

INSTALLATION DIAGRAM

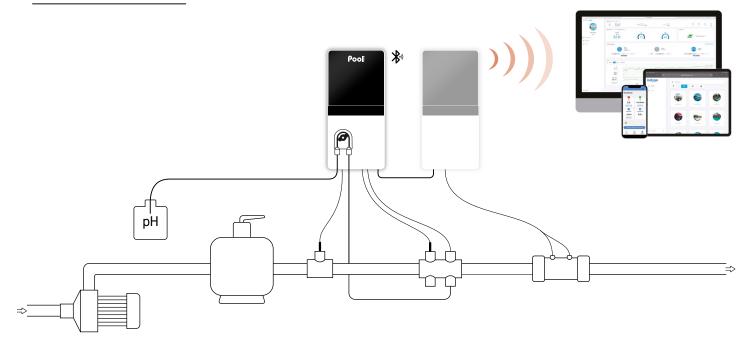

CONTENT

- Control box
- ORP Gold probe
- ORP calibration solution 475 mV
- pH Blue probe
- Calibration solutions pH 7 & pH 10
- Probe holder, injection connector
- Accessories holder with plugs
- \cdot Salt/temperature sensor
- \cdot Saddle clamp (Ø 50 mm)
- Power cable (2 m)
- Reducer Ø 63/50 mm x2
- Wall support (with screws)
- User manual

OPTION

• Measure chamber for ORP probe with connection kit

WARRANTIES







Probe)RP Gold