EUltimate By SPECK



- ♦ Highly energy-efficient syncronised motor
- ♦ High capacity pre-filter
- $\diamond~$ High head and high flow
- Easy open lid with built in handles
- ♦ Robust, strong build
- ♦ Full 3 year HeatForm warranty
- $\diamond~$ 0.5, 0.75, 1.0, 1.5 and 2HP single speed versions
- ♦ 1.5HP Variable speed version
- ♦ Unions supplied






DESCRIPTION					
Operating mode(s)	Controlled by the filtration timer				
Nominal speed	2850 RPM				
Safety features	Automatic shutdown in case of high amperage / overheat situation				
Filter basket volume	2 L				
Compatible pipework	2" inlet & outlet union tailpieces provided				
Use	Fresh water and salt water up to 4 g/L (4000 ppm)				

TECHNICAL SPECIFICATIONS

Model	0.5 HP	0.75 HP	1 HP	1.5 HP	2 HP	1.5hp VS		
Pump type	Self-priming water pump							
Motor type	Asynchronous motor, TEFC, class F insulation							
Efficiency	> 80 % (as per IE3 standard)							
Output power Kw (P2)	0.45	0.65	0.8	1.0	1.5	1.1		
Input power Kw (P2)	0.53	0.73	1.0	1.61	2			
Max amperage (A)	2.4	3.3	4.7	6.9	9.0	7.2		
Power Supply	Single phase							
Flow rate at 10m head (m ³ /h)	10 m ³ /h	13 m³/h	16.5 m³/h	21 m³/h	29 m³/h	25 m³/h		
Maximum flow rate (m ³ /h)	17 m³/h	20 m³/h	27 m³/h	31 m³/h	38m³/h	34 m³/h		
Maximum water temperature	40 °C							
Protection rating	IPX5							

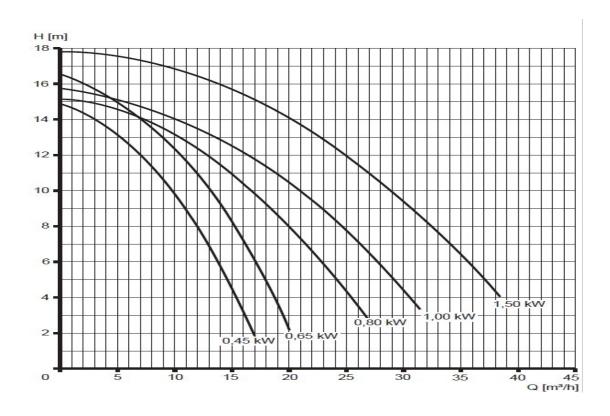



www.lighthousepools.co.uk sales@lighthousepools.co.uk 01752 253525

