Mini UV

UV sterilizer







BENEFITS

- Up to 35% higher UV-C efficiency due to stainless steel internal reflection
- Duplex stainless steel reactor perfectly adpated to salt water
- · High quality softglass UV lamp, 9 000 hours
- Compatible with \emptyset 63 mm and \emptyset 50 mm pipes (including reducing pieces, 11/2 internal thread)
- · IP65 ballast
- 2 models available: 40W and 80W lamp
- · Compact, ideal for small technical rooms
- $\boldsymbol{\cdot}$ Compatible with our ULS Minisalt UV chlorinator to ensure remanence



FEATURES


- $\bullet \ \text{Water sterilisation by ultraviolet rays}\\$
- Easy installation directly on the hydraulic circuit of the pool
- Simplified maintenance

Model	Pool volume (m³)	Flow (m³/h)	Reference
Mini UV 40	50	11	STUV23NPSB-40
Mini UV 80	100	17	STUV23NPSB-80

Technical specifications			
Reactor material	316 L stainless steel		
UV lamp lifespan	9 000 hours		
UV lamp power (W)	40 or 80		
Sealing ballast index	IP65		
Reactor diameter (mm)	70		
Reactor height (mm)	1000		
Reactor weight (kg)	3,3		

^{*}depending on the number of ignitions

INSTALLATION DIAGRAM

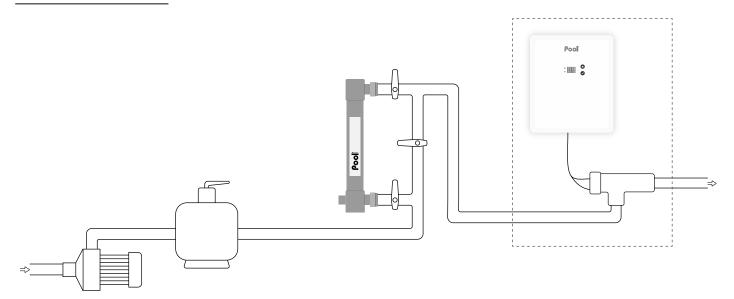

- UV lampGrounding electrode

- Transparent connector Ø 63 (x2)

